

FR-felt acoustic panels



FR-felt acoustic panels

The Fog & Venø fire-retardant felt panel (FR-Felt) is fire-approved in accordance with the test standards EN 13823 and ASTM E84. The FR-Felt panel has been tested both horizontally and vertically, which means that the panel is approved for mounting on both ceilings and walls. FR-Felt panels are approved as a Class B (EN13823) acoustic panel. With this approval, we can supply fire-approved acoustic panels that are certified for use in public and private construction where there are requirements for fire-approved acoustic products.

You can mount our panels directly onto the load-bearing wall or partition wall. If you wish to optimise the acoustic effect, you can mount the panels on a constructed frame of wood, e.g., 45x45 mm, with 45 mm insulation in it; this will increase the acoustic effect.

Our fire-retardant acoustic panel is based on our standard acoustic panel with a polyester backplate, where the plywood slats are attached. The entire panel can be mounted in the same simple way as our standard panels (see the mounting instructions).

With Fog & Venø FR-rated acoustic panels, you get:

Fire-approved

FR-felt acoustic panels are fire-secured and meet the strictest safety standards EN 13823 / Class B and ASTM E84.

Danish craftsmanship

Danish design and production ensure a high standard of quality.

Environmentally friendly materials

Our panels are made from FSC® certified wood.

Healthy indoor climate

Our acoustic panels refine room acoustics and improve the indoor climate.

Functions:

- **Local production**
All panels are produced in Denmark.
- **Acoustic panels for commercial construction**
Ideal for commercial building projects, meets the safety standards EN 13823 / B-s1,d0 and ASTM E84.
- **Quick installation**
Quick and easy installation.
- **Minimal use of tools**
Requires only a few tools for installation and adjustment.
- **Lightweight construction**
The panels have a low weight, which simplifies handling.
- **Varied surface options**
Possibility for different veneer surfaces.
- **Environmentally certified materials**
FSC®-certified plywood and veneer.
- **Cleaning**
Our panels can easily be cleaned with a wrung-out damp cloth or light vacuuming.



Fire-approved in accordance with the test standards EN 13823 and ASTM E84.



Wood panels are made from FSC™ certified wood and veneer and other controlled materials. FSC™ C165957



Sort as recycled wood.



Oak



White Oak



Grey Oak



Smoked Oak





















American Walnut





















Pine

Specifications


EN 13823 / B-s2,d0 - ASTM E84 / Class A


Lamella Width	 Veneer	 Birch plywood	 Felt	 Dimensions	 m ²	 Weight
27 mm 1.06 inch.	Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg
	White Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg
	Grey Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg
	Smoked Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg
	American Walnut			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg
	Pine			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg

EN 13823 / B-s1,d0


Lamella Width	 Veneer	 Birch plywood	 Felt	 Dimensions	 m ²	 Weight
31 mm 1.22 inch.	Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg
	White Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg
	Grey Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg
	Smoked Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg
	American Walnut			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg
	Pine			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	11,9 kg 14,5 kg

EN 13823 / B-s1,d0 - ASTM E84 / Class A


Lamella Width	 Veneer	 Birch plywood	 Felt	 Dimensions	 m ²	 Weight
40 mm 1.57 inch.	Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	14,4 kg 17,5 kg
	White Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	14,4 kg 17,5 kg
	Grey Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	14,4 kg 17,5 kg
	Smoked Oak			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	14,4 kg 17,5 kg
	American Walnut			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	14,4 kg 17,5 kg
	Pine			21 x 600 x 2480 mm - 0.83 x 23.62 x 97.64 inch 21 x 600 x 3000 mm - 0.83 x 23.62 x 118.11 inch	1,48 1,80	14,4 kg 17,5 kg

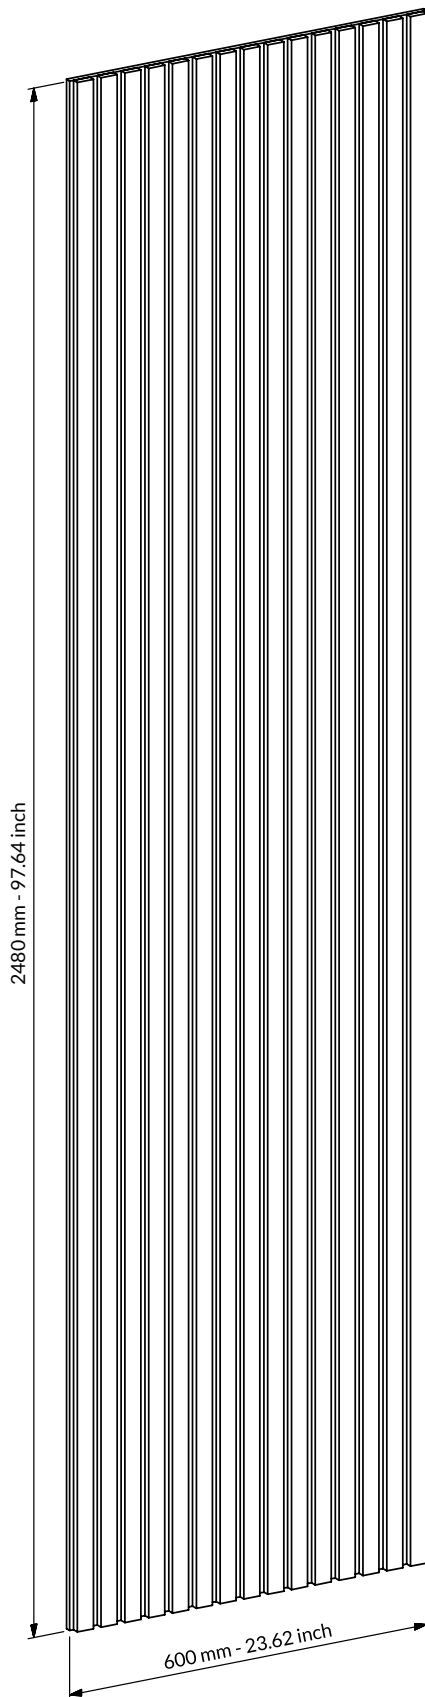


27 mm Lamella Width

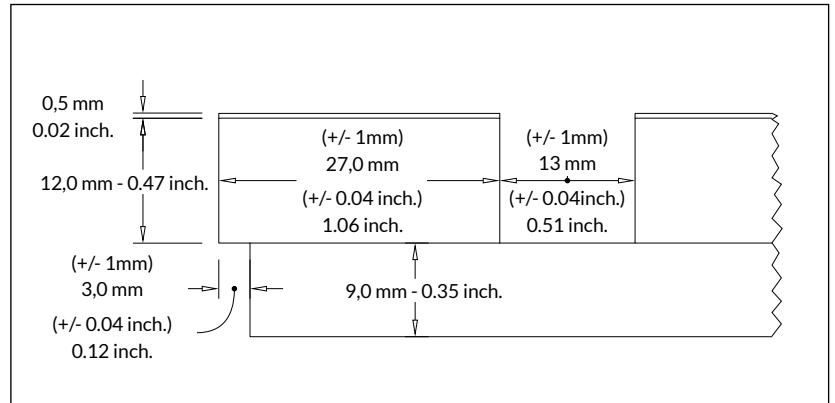

31 mm Lamella Width

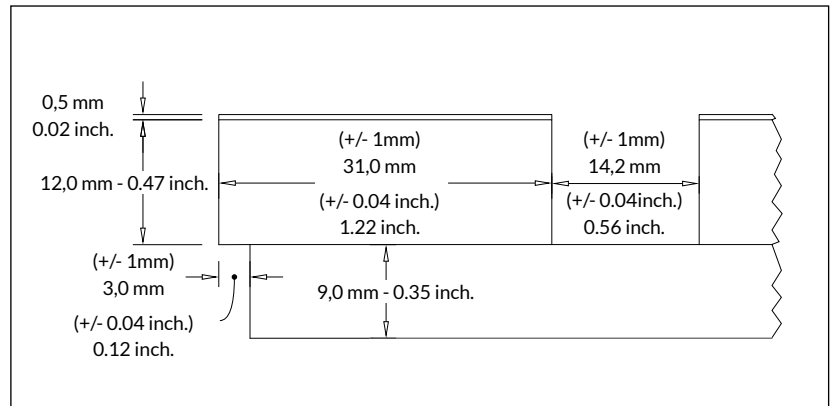

40 mm Lamella Width

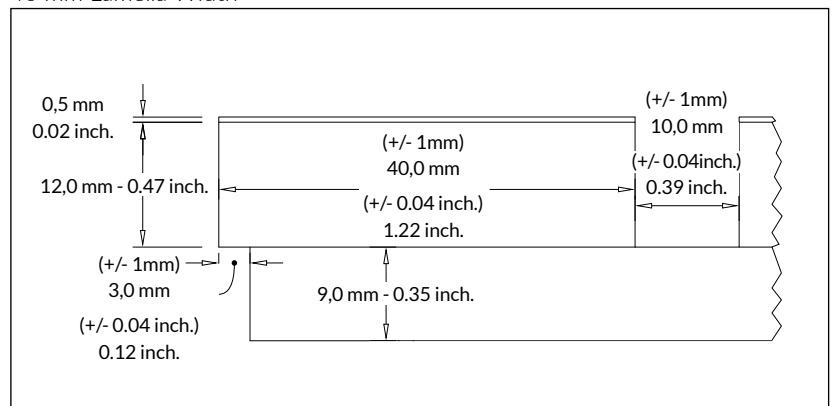

Tolerances

Squareness: +/- 1mm (0.04inch)

Thickness +/- 1mm (0.04inch)

Weight +/- 10%

Acoustic measurements

Sound test i.a.w.. DS/EN ISO 354:2003

Sound test with 45mm insulation

Test area: 10.8 m² 116 ft²
 Room volume: 215 m³ 7592.65 ft³
 Room surface area: 305 m² 3282.99 ft²

Frequency f [Hz]	a _p
125	0.20
250	0.70
500	1.00
1000	0.90
2000	0.65
4000	0.55

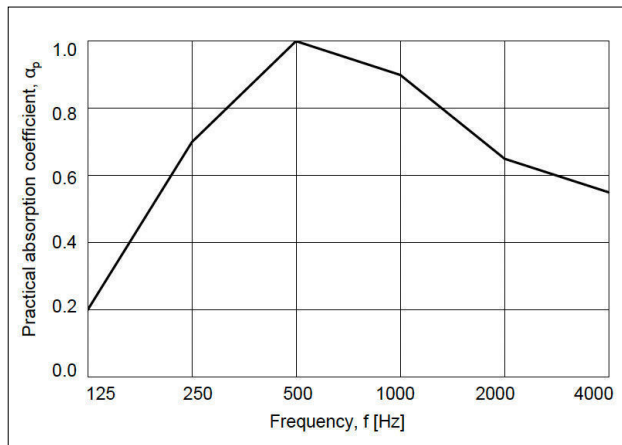


Figure 1: Sound test mounted with 45mm (1.77inch) insulation behind the panel. Closed frame around the edge.

Practical absorption coefficient, weighted absorption coefficient, and absorption class in accordance with EN ISO 11654:1997:

a_w = 0.70(MH)*
Absorption class: C

*It is strongly recommended to use this single-number rating in combination with the complete curve of the sound absorption coefficient.

Sound test with mounting directly on the wall

Test area: 10.8 m² 116 ft²
 Room volume: 215 m³ 7592.65 ft³
 Room surface area: 305 m² 3282.99 ft²

Frequency f [Hz]	a _p
125	0.00
250	0.10
500	0.30
1000	0.75
2000	0.90
4000	0.55

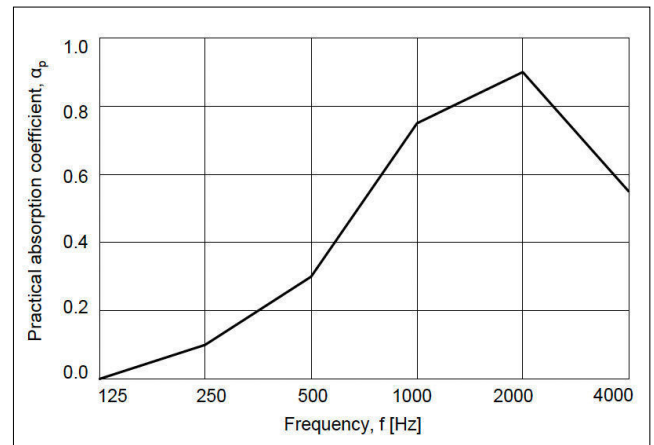


Figure 2: The sound test shows mounting directly on the wall.

Practical absorption coefficient, weighted absorption coefficient, and absorption class in accordance with EN ISO 11654:1997::

a_w = 0.35(MH)*
Absorption class: D

*It is strongly recommended to use this single-number rating in combination with the complete curve of the sound absorption coefficient.

Fire test

Fire test with 40 mm lamellae according to EN 13823:2020

A safe panel for your project

Fog & Venø's fire-approved panel is classified as an EN 13823 / B-s1,d0 product. The graph below shows that the product fully meets the requirements - and has potential classification as an A2/B-s1,d0

Potential classification

Class	A2/B
Smoke production	s1
Flaming droplets/particles	d0

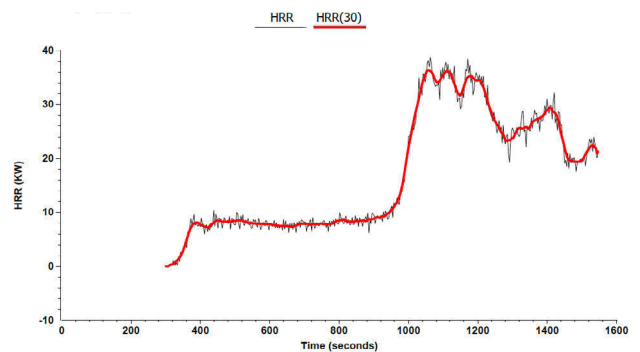


Figure 1: Test assembly at SBI – Vertical and horizontal orientation of slats.

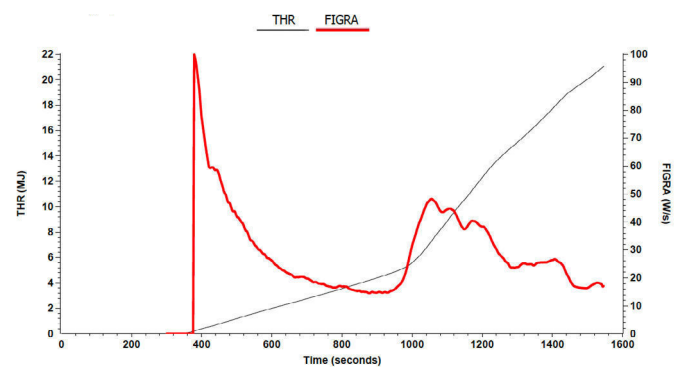



Figure 2: Samples (No. 8784-1-3 and 8784-1-7) after the test.

HRR and HRR(30) graph



THR and FIGRA graph





FOG & VENØ A/S

Fog & Venø is a leading Danish manufacturer of acoustic and decorative panels, with and without acoustic properties. These products are designed and manufactured with a focus on Danish craftsmanship and a constant pursuit of high quality.

The panels are suitable for installation on both walls and ceilings.

Fog & Venø has a strategic partnership with the world's leading suppliers of materials such as wood veneer, linoleum, foil, and laminate, ensuring that all Fog & Venø products maintain a high standard and a wide range of options. This means there is always an echo in the room, and it is here that our acoustic panels make a big difference.

Our Danish-made acoustic panels break the sound and absorb the sound wave, so it fades out when it hits the panels. This means that the sound wave is eliminated and the reverberation time is reduced, which will improve the indoor climate and the sense of well-being in the room, whether we are talking about private, commercial, or public buildings.

Contact information

Fog & Venø A/S
Buntmagervej 5, DK-7490 Aulum
Tel: (+45) 88 77 83 70
hello@fog-veno.com
www.fog-veno.com